




SCHMUTZFÄNGER

192 Schmutzfänger

GESAMTABMESSUNGEN

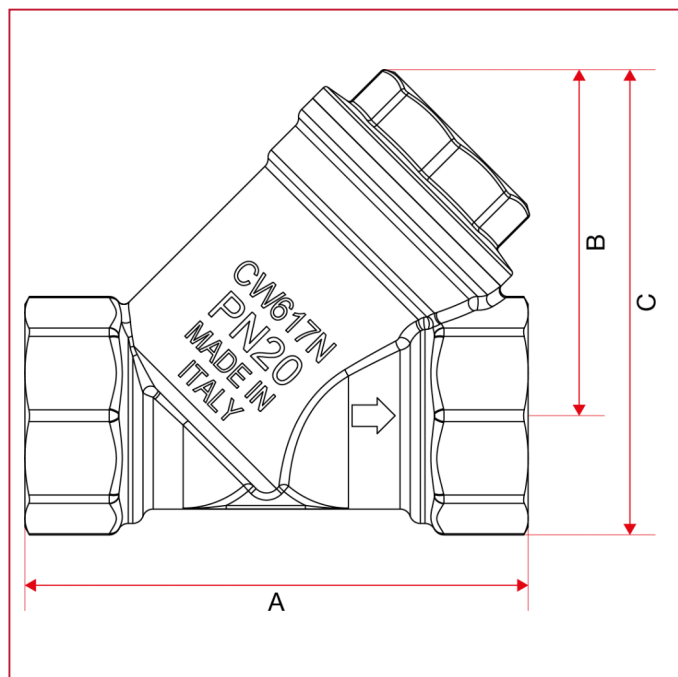


	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN	8	10	15	20	25	32	40	50
A	55	55	58	70	87	96	106	126
B	40	40	40	48	56	64	73	88,5
C	49,4	51	53	65,4	76	88	100	122
Kg/cm2 bar	20	20	20	20	20	20	20	20
LBS - psi	290	290	290	290	290	290	290	290



SCHMUTZFÄNGER

192 Schmutzfänger

WERKSTOFFE

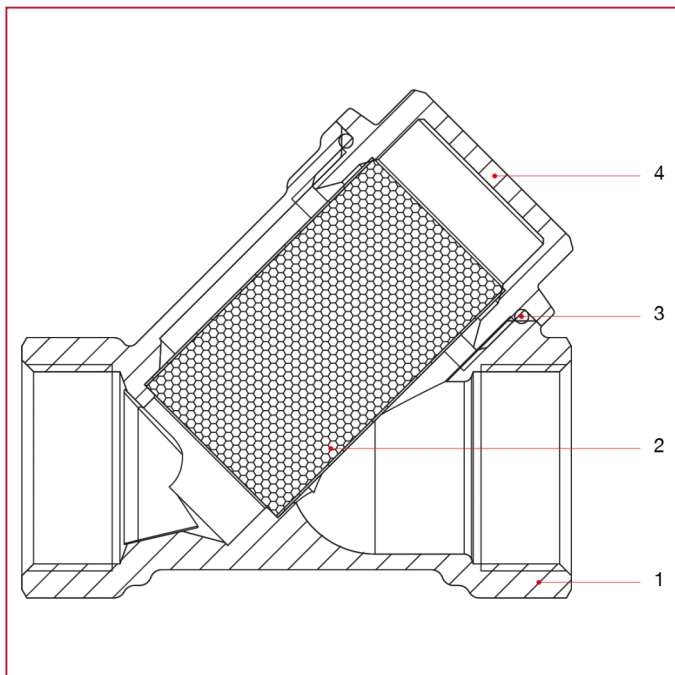


NUM.	BESCHREIBUNG	Qt	MATERIALIEN
1	Gehäuse	1	Messing CW617N
2	Kartusche	1	Edelstahl AISI 304
3	O-Ring	1	NBR
4	Muffe	1	Messing CW617N



192 Schmutzfänger

DRUCKVERLUSTDIAGRAMM (Mit Wasser)

	1/4"	3/8"	1/2"	3/4"	1"	1"1/4"	1"1/2"	2"
KV	1,7	2,4	3,5	6,5	8	10	11,5	19,6

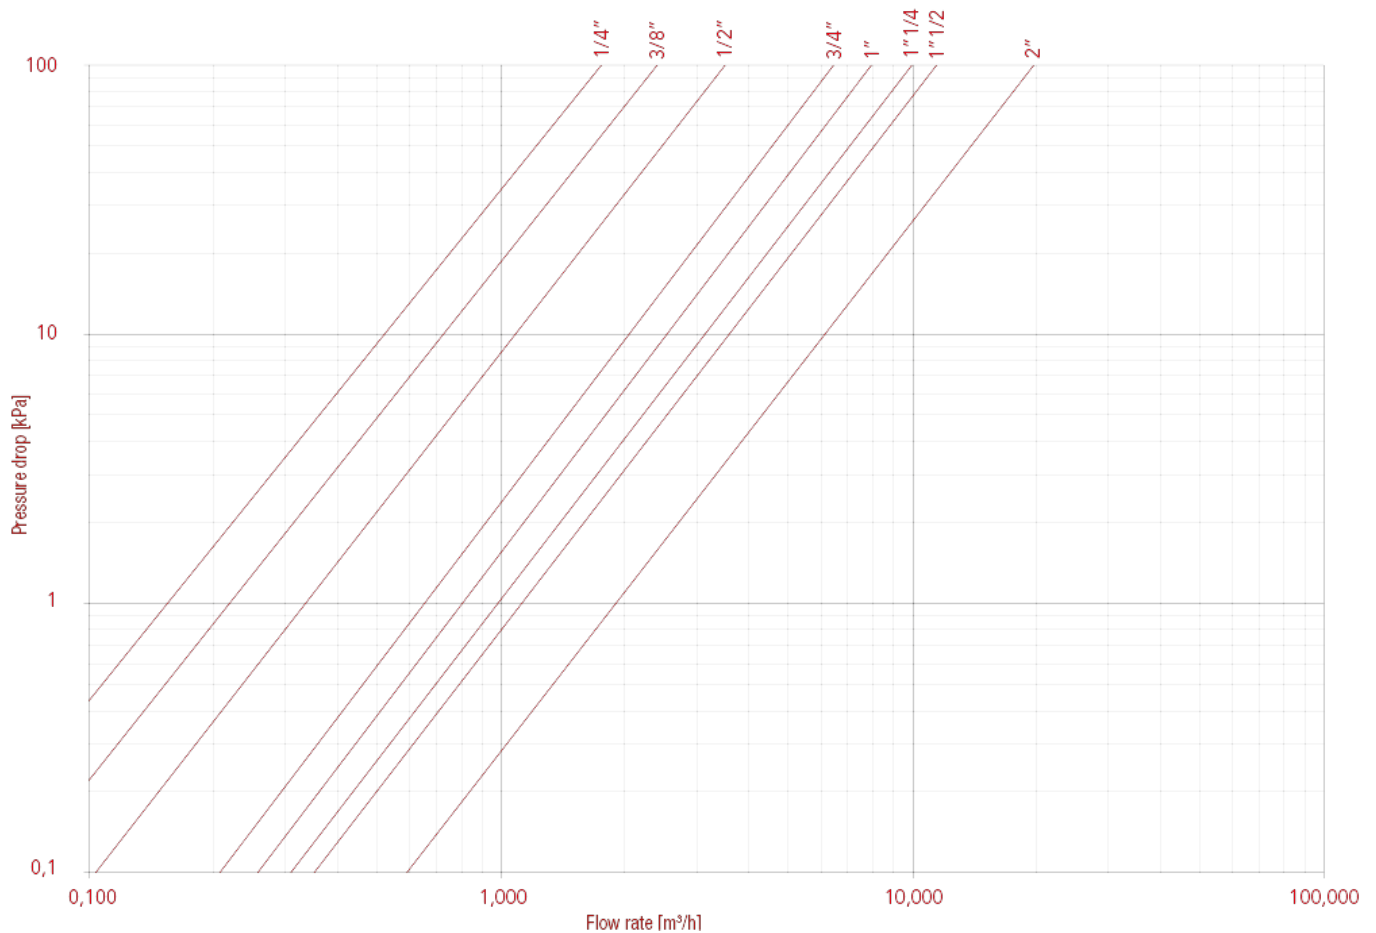



192 Schmutzfänger

DRUCK-TEMPERATUR-DIAGRAMM

Die Kennlinienwerte stellen die maximale Einsatzgrenze der Ventile dar.
Bei den Wertangaben handelt es sich um Richtwerte.

