




# Flores





## Montaža Flores

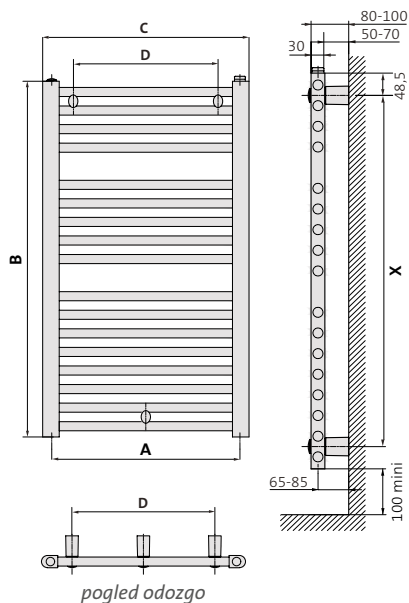

## Montaža Flores T

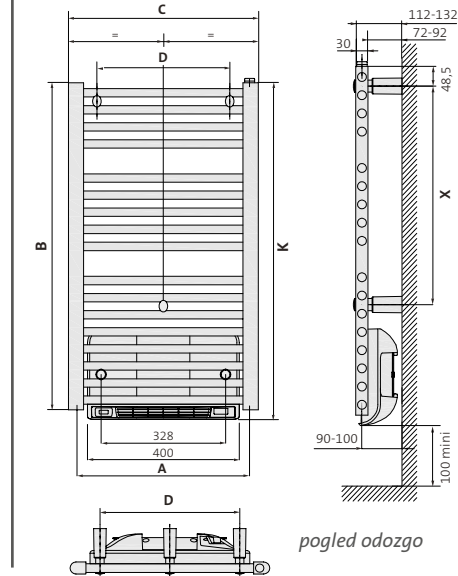

## Priključci



- A = od sredine do sredine priključaka
- B = visina
- C = duljina
- D = od sredine do sredine nosača u vodoravnom smjeru
- X = od sredine do sredine nosača u okomitom smjeru

FLORES						težina (kg)	volumen (l)	vrijednost n	75/65/20 °C (Watt)	45/35/20 °C (Watt)	Δ T 30 (Watt)
Tip	A	B	C	D	X						
FL0505	455	547	500	350	450	4,00	2,68	1,2090	257	83	139
FL0508	455	862	500	350	765	6,20	3,90	1,2540	417	129	220
FL0512	455	1222	500	350	1125	8,80	5,50	1,2670	576	176	302
FL0612	555	1222	600	450	1125	10,40	6,10	1,2800	676	204	352
FL0712	705	1222	750	600	1125	12,40	7,10	1,2920	826	246	427
FL0515	455	1537	500	350	1440	11,00	6,90	1,2790	718	216	374
FL0615	555	1537	600	450	1440	12,70	7,90	1,2880	842	252	436
FL0715	705	1537	750	600	1440	15,30	9,40	1,2970	1030	305	531
FL0518	455	1807	500	350	1710	13,10	8,10	1,2910	866	258	448
FL0618	555	1807	600	450	1710	15,40	9,40	1,2960	1014	301	523
FL0718	705	1807	750	600	1710	18,40	11,20	1,3020	1237	365	636

FLORES T							težina (kg)	volumen (l)	75/65/20 °C (Watt)
Tip	A	B	C	D	K	X			
FL0505EDT	455	547	500	350	572	225	6,50	2,68	1207
FL0508EDT	455	862	500	350	887	540	8,70	3,90	1367
FL0512EDT	455	1222	500	350	1247	900	11,30	5,50	1526
FL0612EDT	555	1222	600	450	1247	900	12,90	6,10	1626
FL0712EDT	705	1222	750	600	1247	900	14,90	7,10	1776
FL0515EDT	455	1537	500	350	1562	1215	13,50	6,90	1668
FL0615EDT	555	1537	600	450	1562	1215	15,20	7,90	1792
FL0715EDT	705	1537	750	600	1562	1215	17,80	9,40	1980
FL0518EDT	455	1807	500	350	1832	1485	15,60	8,10	1816
FL0618EDT	555	1807	600	450	1832	1485	17,90	9,40	1964
FL0718EDT	705	1807	750	600	1832	1485	20,90	11,20	2187

skladište 75/65/20 prema EN442 • ostali režimi po analogiji s EN442

dimenzije u mm