


G351169

Radijator kupaonski TermaBad R02, 1775x500 mm, 822 W



| Essential characteristics / Bitne karakteristike | Performance / Svojstva |
|--|--|
| Height / Visina (mm) | 1775 |
| Width / Širina (mm) | 500 |
| Axes distance / Razmak priključaka (mm) | 455 |
| Depth / Debljina | 48 |
| Pipe Number / Broj cijevi | 32 |
| Water content / Volumen (L) | 7,7 |
| Weight / Težina (kg) | 10,5 |
| EN442 (Watt) | 822 |
| Color / Boja | White RAL 9016 / bijela RAL 9024 |
| Operating pressure / Radni tlak | 3-6 Bar |
| Test pressure / Ispitni tlak | 8 Bar |
| Operating temperature / Radna temperatura | max. 110 ° C |
| Description / Opis | <ul style="list-style-type: none"> • horizontal straight steel tubes 22 x 1 mm and vertical D-profile collecting tubes 40 x 30 x 1.5 mm • horizontalne ravne čelične cijevi 22 x 1 mm i vertikalne cijevi za odvajanje D profila od 40 x 30 x 1,5 mm |
| Connections / Priključci | <ul style="list-style-type: none"> • 4 x 1/2 female thread for supply and return, can be switched left/right, 1x air vent, 1x blind plug • 4 x 1/2 unutarnji navoj za polazni i povratni ventil, mogu se zamijeniti lijevo/desno, 1x odzračni pipac, 1xčep |
| Accessories / Pribor | <ul style="list-style-type: none"> • wall brackets, air vent, plug, screws • zidne konzole, odzračni pipac, čep, vijci |

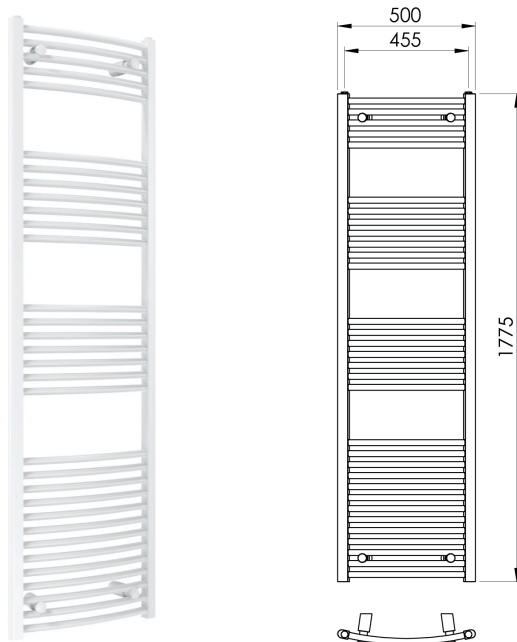