


## TERMA BURANO

### Technical specifications / Tehnička specifikacija

Code / Šifra:	See table below Vidi tablicu niže
Description	main tube 30*40*1,5 mm cross tube 50*10 mm
Opis	glavan cijev 30*40*1,5 mm poprečna cijev 50*10 mm
Connections	4 x 1/2" female thread for supply and return, can be switched left/right, 1x air vent, 1x blind plug
Priključci	4 x 1/2" unutarnji navoj za polazni i povratni ventil, mogu se zamijeniti lijevo/desno, 1x odzračni pipac, 1xčep
Accessories Pribor	wall brackets, air vent, plug, screws zidne konzole, odzračni pipac, čep, vijci
Operating pressure	3-6 Bar
Radni tlak	3-6 Bar
Test pressure	8 Bar
Ispitni tlak	8 Bar
Operating temp.	max. 110 ° C
Radna temperatura	max. 110 ° C

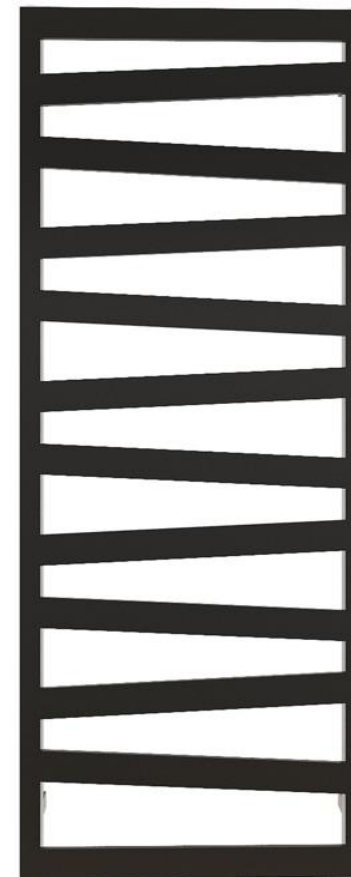

Code / Šifra	Hight / Visina A (mm)	Width / Širina B (mm)	Axes distance/ Razmak priključaka C (mm)	Depth/ Debljina (mm)	Pipe num. Broj Cijevi	Water content / Volumen L	Color Boja	Weight / težina KG	EN442 (Watt)	Rated thermal outputs / nazivna toplinska snaga	Thermal output in different operating Toplinska snaga u različitim uvjetima rada
G668027	1200	500	470	40	10	3,5	white bijela	10,10	476	Φ30=252W Φ50=476W	Φ=3,6903 *ΔT <sup>1.2422</sup>
G668028	1200	600	570	40	10	3,9	white bijela	10,70	539	Φ30=285W Φ50=539W	Φ=4,1845 *ΔT <sup>1.2419</sup>
G668029	1200	500	470	40	10	3,5	black matt crna mat	10,10	490	Φ30=260W Φ50=490W	Φ=3,8394 *ΔT <sup>1.2394</sup>
G668030	1200	600	570	40	10	3,9	black matt crna mat	10,70	555	Φ30=294W Φ50=555W	Φ=4,2887 *ΔT <sup>1.2431</sup>

