
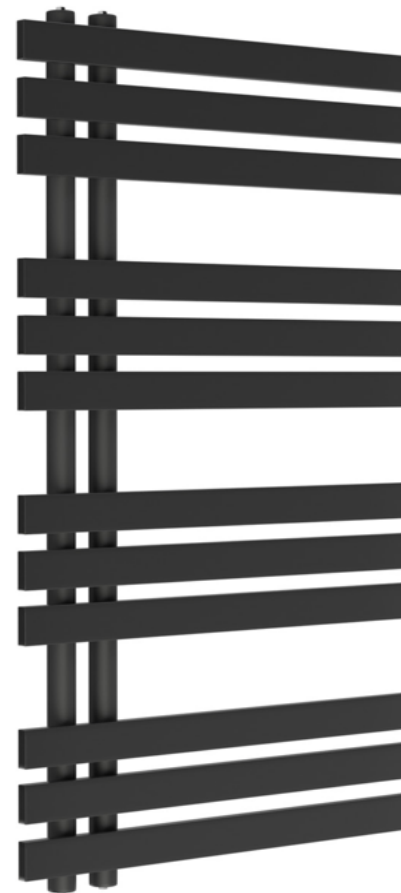


TERMA TINETTO

Technical specifications / Tehnička specifikacija

Code / Šifra:	See table below Vidi tablicu niže
Description	vertical tube 35*1,5 mm horizontal tube 42*14*1,5 mm
Opis	vertikalna cijev 35*1,5 mm horizontalna cijev 42*14*1,5 mm
Connections	4 x 1/2" female thread for supply and return, can be switched left/right, 1x air vent, 1x blind plug
Priključci	4 x 1/2" unutarnji navoj za polazni i povratni ventil, mogu se zamijeniti lijevo/desno, 1x odzračni pipac, 1xčep
Accessories Pribor	wall brackets, air vent, plug, screws zidne konzole, odzračni pipac, čep, vijci
Operating pressure Radni tlak	3-6 Bar
Test pressure Ispitni tlak	8 Bar
Operating temp. Radna temperatura	max. 110 ° C

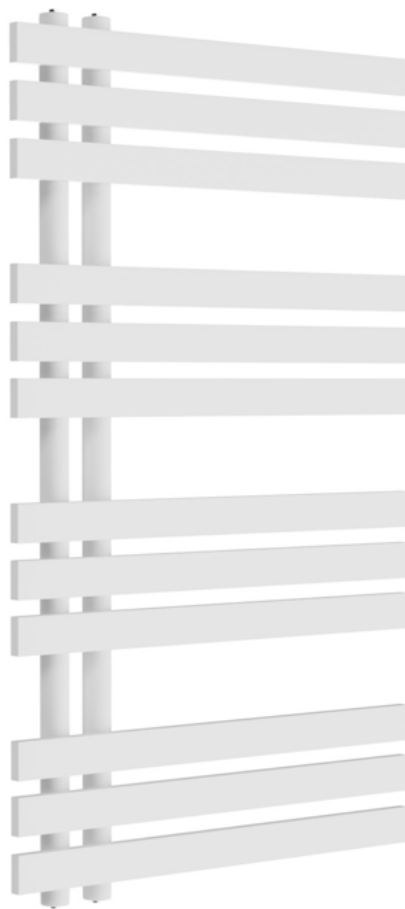

Code / Šifra	Hight / Visina A (mm)	Width / Širina B (mm)	Axes distance/ Razmak priključaka C (mm)	Depth/ Debljina (mm)	Pipe num. Broj Cijevi	Water content / Volumen L	Color Boja	Weight / težina KG	EN442 (Watt)	Rated thermal outputs / nazivna toplinska snaga	Thermal output in different operating Toplinska snaga u različitim uvjetima rada
G668031	950	500	50	62	12	3,7	white bijela	11,00	448	Φ30=242W Φ50=448W	Φ=4,1204 *ΔT ^{1.1986}
G668032	1200	500	50	62	15	4,6	white bijela	14,00	561	Φ30=303W Φ50=561W	Φ=4,8704 *ΔT ^{1.2135}
G668033	1700	500	50	62	21	6,5	black matt crna mat	19,00	788	Φ30=428W Φ50=788W	Φ=6,9095 *ΔT ^{1.2109}
G668034	950	600	50	62	12	4,2	black matt crna mat	12,40	515	Φ30=278W Φ50=515W	Φ=4,3662 *ΔT ^{1.2194}
G668035	1200	600	50	62	15	5,3	white bijela	15,30	645	Φ30=348W Φ50=645W	Φ=5,7935 *ΔT ^{1.2046}
G668036	1700	600	50	62	21	7,4	white bijela	21,20	906	Φ30=489W Φ50=906W	Φ=7,9566 *ΔT ^{1.2108}
G668037	950	500	50	62	12	3,7	black matt crna mat	11,00	461	Φ30=249W Φ50=461W	Φ=4,2285 *ΔT ^{1.1991}
G668038	1200	500	50	62	15	4,6	black matt crna mat	14,00	578	Φ30=312W Φ50=578W	Φ=5,0033 *ΔT ^{1.2144}
G668039	1700	500	50	62	21	6,5	white bijela	19,00	811	Φ30=438W Φ50=811W	Φ=7,0911 *ΔT ^{1.2117}
G668040	950	600	50	62	12	4,2	white bijela	12,40	531	Φ30=287W Φ50=531W	Φ=4,7815 *ΔT ^{1.2039}
G668041	1200	600	50	62	15	5,3	black matt crna mat	15,30	665	Φ30=359W Φ50=665W	Φ=5,9595 *ΔT ^{1.2051}
G668042	1700	600	50	62	21	7,4	black matt crna mat	21,20	933	Φ30=504W Φ50=933W	Φ=8,2022 *ΔT ^{1.2103}

