



## DECLARATION OF PERFORMANCE

### IZJAVA O UČINKU

No. 003CPR2013-07-01

1. Unique identification code of the product type  
Jedinstveni identifikacijski kod vrste proizvoda  
Type, batch or serial number or any other element allowing identification of the product  
Tip, šarža ili serijski broj ili bilo koji drugi element koji omogućuje identifikaciju proizvoda  
**Dry-pressed ceramic tiles, with low water absorption  $E_b \leq 0,5 \%$**   
**Suho prešane keramičke pločice, s niskim upijanjem vode  $E_b \leq 0,5 \%$**
2. Intended use(s)  
Namjena  
**For internal and external, floorings and wall finishes**  
**Unutarnja i vanjska, podovi i zidne završne obloge**
3. Name or registered trade mark, and contact address of the manufacturer  
Ime ili registrirani zaštitni znak i kontakt adresa proizvođača  
**PAMESA CERÁMICA, S.L.**  
**Camino Alcora, 8 – Apdo. Correos 14**  
**12550 Almazora (Castellón) SPAIN**
4. System(s) of assessment and verification of constancy of performance (AVCP)  
Sustav(i) ocjenjivanja i provjere postojanosti performansi (AVCP)  
**Systems 4**  
**Sistemi 4**
5. Name and identification number of notified laboratory, if relevant – **not applicable**  
Ime i identifikacijski broj prijavljenog laboratorija, ako je relevantno – nije primjenjivo  
Task(s) carried out  
Izvršeni zadaci  
AVCP system  
AVCP sistem  
Document issued and date of issue  
Dokument izdan i datum izdavanja

6. Declared performances  
Najavljene izvedbe

Essential characteristics Bitne karakteristike	Performance Izvedba	Harmonised technical specification Usklađena tehnička specifikacija
Reaction to fire Reakcija na vatru	A1 <sub>FL</sub> /A1	EN 14411:2012
Release of dangerous substance, for: Ispuštanje opasnih tvari, za:		
- Cadmium - Kadmij	NPD	
- Lead - Olovo	NPD	
Breaking strength Prekidna čvrstoća	> 1 300 N	
Slipperiness Sklisnost	NPD	
Tactility TAKTILNOST	NPD	
Bond strength/adhesion, for: Čvrstoća veze/prijanjanje, za:		
Cementitious adhesive, type C2 Cementno ljepivo , tip C2	> 1 N/mm <sup>2</sup>	
Thermal shock resistance Otpornost na toplinski udar	Pass	
Durability for: Izdržljivost za :		
- internal use: - unutarnju uporabu:	Pass	
- external use: freeze-thaw resistance - vanjsku uporabu : otpor pri smrzavanju	Pass	

The performance of the product identified in point 1 is in conformity with the declared performances in point 6.  
Učinak proizvoda identificiran u točki 1. u skladu je s deklariranim svojstvima u točki 6.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 3.  
Ova izjava o svojstvima izdaje se na isključivu odgovornost proizvođača navedenog u točki 3.

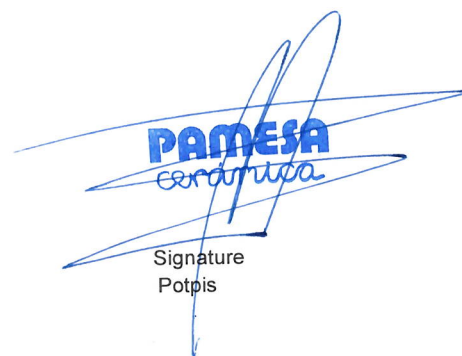
Signed for and on behalf of the manufacturer by:

Potpisao za i u ime proizvođača:

Juan Luis López García (Technical Manager)

Name and function  
Ime i funkcija

Almazora, 01-07-2013  
Place and date of issue  
Mjesto i datum izdavanja

  
**PAMESA**  
certificada  
Signature  
Potpis