



Simplex Drain/overflow


flat version; only 33 mm space required behind the bathtub

Components

flexible overflow pipe, chrome-plated rotatable rosette, chrome-plated drain plug, odour trap, waste elbow 45°, stainless steel valve

Model 6168.45

Article 285 357

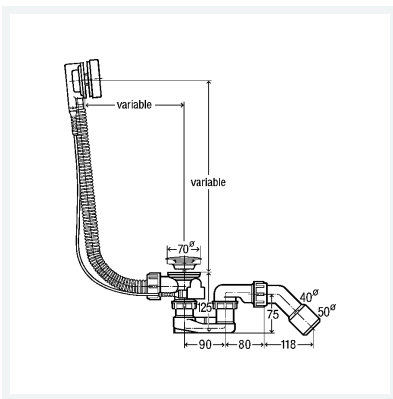

Properties

Water seal height	WSH	50 mm
Drainage capacity 300 mm (in accordance with EN 274)	DC 300	0.92 l/s
Flush volume factory setting	SC 60	0.63 l/s
Nominal diameter	DN	40/50
Bowden wire length	BWL	560
Standard bathtub	SB	✓
For bathtub with Ø 52 drain hole	B52	✓
Weight	568 g	
Volume	4564.56 cm ³	